HALF OVERLAY GLASS DOOR HINGE (W/CATCH) NO SCREW GHC-34/8

GHC-34/8/CR

GHC-34/8/BLK

GHC-34/8/PB



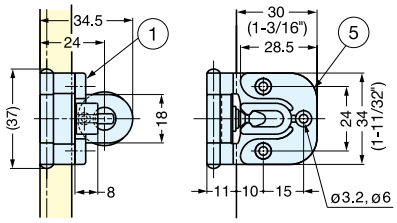

- Half overlay.
- Hinge will hold door in closed position without secondary support.
- Door thickness: 3/16"~1/4" (4~6 mm)
- Max. Door size: W17-3/4" × H27-9/16" (W450 × H700)
- Max. Door weight: 8.8 lbs/pair (4 kg/pair)



Cut Out Dimension

No.	Part Name	Material		Finish
①	Body	GHC-34/8/BLK	304 Stainless Steel	Black
		GHC-34/8/CR	Steel	Chrome
		GHC-34/8/PB		Polished Brass
②	Plate	GHC-34/8/BLK	Aluminum	Black
		GHC-34/8/CR	Brass	Chrome
		GHC-34/8/PB		Polished Brass
③	Washer	PVC		Clear
④	Screw	Steel		Nickel
⑤	Catch	Polyacetal		Black

Glass Thickness	A	Overlay (mm)
3/16" (4 mm)	3/4" (19 mm)	1/4" (7 mm)
3/16" (5 mm)	11/16" (18 mm)	1/4" (6 mm)
1/4" (6 mm)	11/16" (17 mm)	3/16" (5 mm)

Item No.	D_1	D_2	d	T	Weight (g)	Box (pcs)	Carton (pcs)
GHC-34/8/CR	13/16" (20 mm)	1/4" (6.5 mm)	5/16" (8 mm)	1/16" (2 mm)	36	40	600
GHC-34/8/PB	13/16" (20 mm)	1/4" (6.5 mm)	5/16" (8 mm)	1/16" (2 mm)	36		
GHC-34/8/BLK	13/16" (21 mm)	5/16" (8 mm)	3/8" (10 mm)	1/8" (3 mm)	32		

HALF OVERLAY GLASS DOOR HINGE (W/CATCH) NO SCREW GHC-34-8CR-K



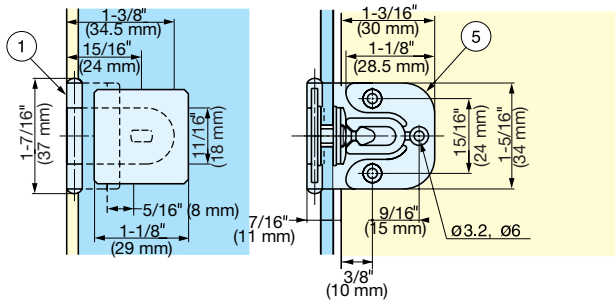

- Half overlay.
- Hinge for glass/acrylic doors.
- Door thickness: 3/16"~1/4" (4~6 mm)
- Max. Door size: W17-3/4" × H27-9/16" (W450 × H700)
- Max. Door weight: 8.8 lbs/pair (4 kg/pair)
- Rounded plate GHC-34/8/CR is available.



Cut Out Dimension

Glass Thickness	A	Overlay (mm)
3/16" (4 mm)	3/4" (19 mm)	1/4" (7 mm)
3/16" (5 mm)	11/16" (18 mm)	1/4" (6 mm)
1/4" (6 mm)	11/16" (17 mm)	3/16" (5 mm)

No.	Part Name	Material	Finish/Color
①	Body	Steel	Chrome
②	Plate	Zinc Alloy	Chrome
③	Washer	PVC	Clear
④	Screw	Steel	Nickel
⑤	Stopper	Polyacetal (POM)	Black

Item No.	Weight (g)	Box (pcs)	Carton (pcs)
GHC-34-8CR-K	43	40	600