NON-MAGNETIC TOUCH LATCH

RoHS compliant | 2.7×13 2.4×10 STEEL

MC-28

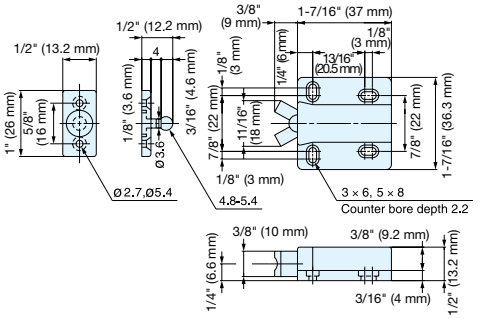

- Push to latch/unlatch.
- Touch latch with floating strike allows for easy alignment.

Note:
- For overlay door, allow 1/8" (3 mm) gap between door and cabinet frame for push space.
- Pulling door with excessive force without unlatching the unit may damage the mechanism.
- Constant loading of over 6.6 lbs (3 kg) or excessive pushing or pulling is not recommended.

Item No.	Retaining Force	Weight (g)	Box (pcs)	Carton (pcs)
MC-28/BLK	6.6 lbs (3 kg)	15	50	500

Part Name	Material	Color
Body	ABS	Black
Arm	Polyacetal	
Strike	Polyamide	

NON-MAGNETIC TOUCH LATCH

RoHS compliant | NO SCREW

PR-21P/BLK

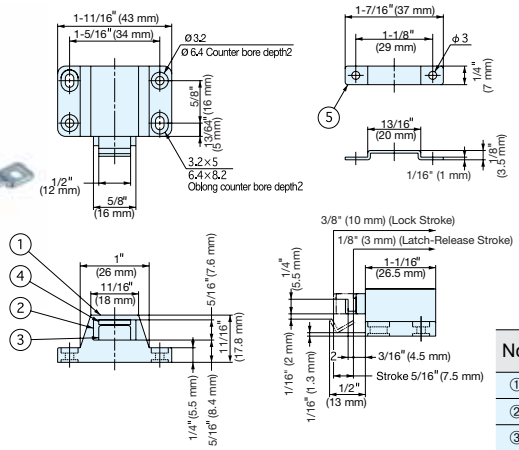

- Push to latch/unlatch.
- Strong retaining force.

Item No.	Retaining Force	Weight (g)	Box (pcs)	Carton (pcs)
PR-21P/BLK	22 lbs (10 kg)	16.3	100	800

No.	Part Name	Material	Finish/Color
①	Housing	ABS	Black
②	Slide	Polyacetal	
③	Arm	Steel	Brown
④	Yoke		GB
⑤	Strike		Chromate

NON-MAGNETIC TOUCH LATCH

RoHS compliant

PR-3PK

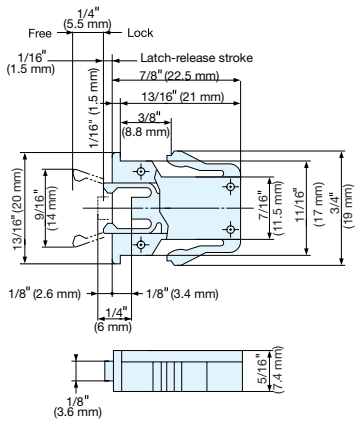

- Push to latch/unlatch.
- Thin design is ideal for tight spaces.
- Snap-in style latch.
- Strike/Counterplate not available.



Recommended Strike Dimension



Cut Out Dimensions



Installation

Item No.	Retaining Force	Weight (g)	Box (pcs)	Carton (pcs)
PR-3PK	4.8 lbs (2.2 kg)	2.5	400	4000

Material	Color
ABS	Black