RECESSED HOOK

RoHS compliant | LOAD CAPACITY 20 kg 44 lbs | TEST 17 P.698 | NO SCREW

NF-60

- Hook is spring loaded to retract.
- Ideal for vibration or shock applications.
- Panel Thickness: - Wood: Min. 13/16" (20 mm)
  - Sheet metal: 1/32"~1/16" (0.8~1.6 mm) with optional bracket NF-50, sold separately.

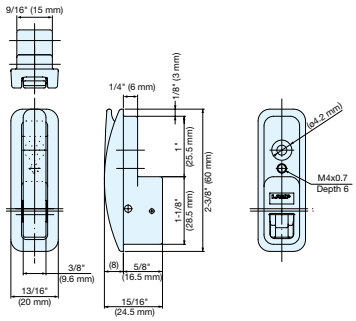



Bore Dimensions
For thickness over 1-3/16" (30 mm)



Bore Dimensions
For thickness 13/16"~1-1/8
(20~29 mm)

Part Name	Material	Finish
Body	Aluminum	Grey
Pin/Spring	304 Stainless Steel	Plain
Rubber	Polychloroprene	Black

Item No.	Load Capacity	Weight (g)	Box (pcs)	Carton (pcs)
NF-60	44 lbs (20 kg)	31	10	200

SOFT CLOSE RECESSED HOOK

RoHS compliant | LOAD CAPACITY 30 kg 66 lbs | TEST 17 P.698 | NO SCREW

NF-60D

Grey Silver Metallic Silver

- Hook is spring loaded to retract with a soft closing action.
- Ideal for vibration or shock applications.
- Panel Thickness: - Wood: Min. 1" (25 mm)
  - Sheet metal: 1/32"~1/16" (0.8~1.6 mm) with optional bracket NF-50, sold separately.

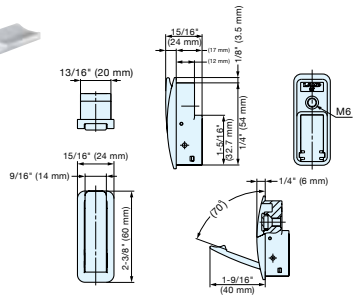



Bore Dimensions
(For thickness over 1-3/16" (30 mm)



Bore Dimensions
(For thickness 1"~1-1/8" (25~29 mm)

Part Name	Material	Finish
Body	Aluminum	Grey/Silver Metallic Silver
Pin/Spring	304 Stainless Steel	Plain
Rubber	Polychloroprene	Black
Rear Cover	POM	Grey

Item No.	Finish	Load Capacity	Weight (g)	Box (pcs)	Carton (pcs)
NF-60D/GR	Grey	66 lbs (30 kg)	49	10	200
NF-60D/SL	Silver				
NF-60D/MSL	Metallic Silver				

Bracket for sheet metal application



Supplied with M4×14 Stainless steel screw.



Cut Out Dimensions for NF-60



Cut Out Dimensions for NF-60D

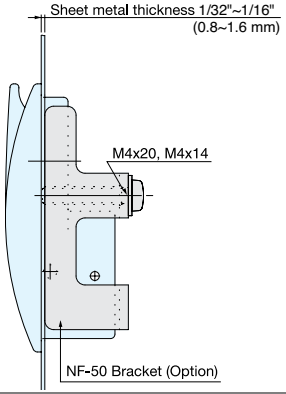

Item No.	Weight (g)	Box (pcs)	Carton (pcs)	Material	Finish
NF-50	22	20	400	Steel	Yellow Zinc Chromate