INSET DOOR PIVOT HINGE PP

Left handed model shown.

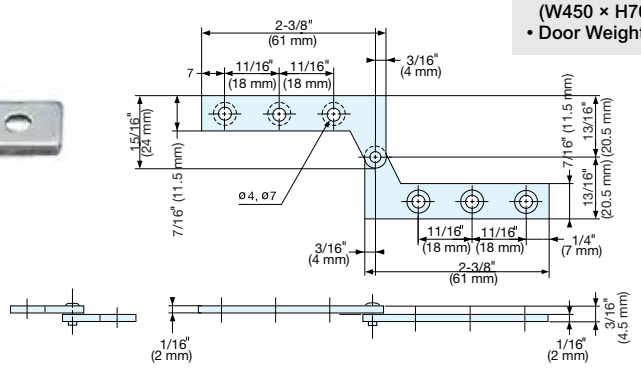

Right handed model shown.

- Door Size: Max. W17-3/4" × H27-9/16" (W450 × H700 mm)
- Door Weight: Max. 5.7 lbs/pair (2.6 kg/pair)

Item No.		Weight (g)	Box (pcs)	Carton (pcs)
Left	Right			
PP-L	PP-R	22	100	1000

Material	Finish
430 Stainless Steel	Plain

INSET DOOR PIVOT HINGE PH

Left handed model shown.



Right handed model shown.



Installation

- Door Size: Max. W17-3/4" × H27-9/16" (W450 × H700 mm)
- Recommended Door Thickness:
  PH-50 : Min. 9/16" (14 mm)
  PH-60 : Min. 10/16" (16 mm)
  PH-80 : Min. 3/4" (20 mm)
  PH-95 : Min. 1-1/8" (28 mm)
- Door Weight:
  PH-50, 60: Max. 5.7 lbs/pair (2.6 kg/pair)
  PH-80, 95: Max. 8.8 lbs/pair (4 kg/pair)

Material	Finish
Brass	Satin Nickel

Item No.	L	t	H	A	B	C	P1	P2	P3	d	Door Thickness	Weight (g)	Box (pcs)	Carton (pcs)	Screws
PH-50	2" (50)	3/16" (4)	1/2" (13)	3/8" (10)	9/16" (14)	3/8" (10)	11/16" (17)	5/16" (8)	3/8" (9)	1/8" (3.2)	9/16" (14 mm)	40	10	20	3.1 × 20
PH-60	2-3/8" (60)	3/16" (4.5)		1/2" (12)	5/8" (16)	1/2" (12)	13/16" (21)	3/8" (9)			5/8" (16 mm)	60			
PH-80	3-1/8" (80)	1/4" (6)	7/8" (22)	5/8" (16)	13/16" (20)	9/16" (15)	1-3/16" (30)	3/8" (10)	1/2" (12)	3/16" (4.2)	13/16" (20 mm)	170	8	32	3.8 × 25
PH-95	3-3/4" (95)	1/4" (6.5)		3/4" (19)	1-1/8" (28)	5/8" (16)	1-3/8" (35)	1/2" (12.5)	3/4" (18.5)		1-1/8" (28 mm)	250	6	24	

() units in mm.

INSET DOOR PIVOT HINGE PAW

Left handed model shown.



Right handed model shown.



Installation

- Door Size: Max. W17-3/4" × H27-9/16" (W450 × H700 mm)
- Recommended Door Thickness:
  PAW-50 : 9/16" (14 mm)
  PAW-60 : 10/16" (16 mm)
  PAW-80 : 3/4" (20 mm)
  PAW-95 : 1-1/8" (28 mm)
- Door Weight:
  PAW-50, 60: Max. 5.7 lbs/pair (2.6 kg/pair)
  PAW-80, 95: Max. 8.8 lbs/pair (4 kg/pair)

Material	Finish
Brass	Satin Nickel

Item No.	L	t	H	A	B	C	P1	P2	P3	P4	d	Door Thickness	Weight (g)	Box (set)	Carton (set)	Screws
PAW-50	2" (50)	3/16" (4)	1-3/4" (45)	3/8" (10)	9/16" (14)	3/8" (10)	11/16" (17)	5/16" (8)	1/2" (13)	1/2" (12.5)	1/8" (3.2)	9/16" (14 mm)	43	10	200	3.1 × 20
PAW-60	2-3/8" (60)	3/16" (4.5)	2" (50)	1/2" (12)	5/8" (16)	1/2" (12)	13/16" (21)	3/8" (9)	1/2" (12.5)	5/8" (15.5)		5/8" (16 mm)	62			
PAW-80	3-1/8" (80)	1/4" (6)	2-3/4" (70)	5/8" (16)	13/16" (20)	9/16" (15)	1-3/16" (30)	3/8" (10)	9/16" (15)	15/16" (23)	3/16" (4.2)	13/16" (20 mm)	172	8	32	3.8 × 25
PAW-95	3-3/4" (95)	1/4" (6.5)	3-1/8" (80)	3/4" (19)	1-1/8" (28)	5/8" (16)	1-3/8" (35)	1/2" (12.5)	11/16" (18)	1" (25.5)		1-1/8" (28 mm)	248	6	24	

() units in mm.