LID STAY

RoHS compliant | STAINLESS 304 STEEL | LOAD CAPACITY 30~40 kg 66~88 lbs | NO SCREW

S-91, 92, 93

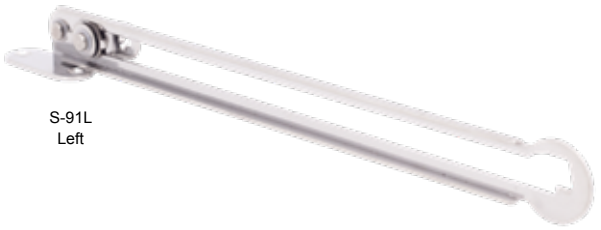

S-91L
Left

- Automatically holds lid in opened position.
- Lift up lid to release.
- Can be installed individually or in pairs.
- Handed : Specific left and right hand mounting.

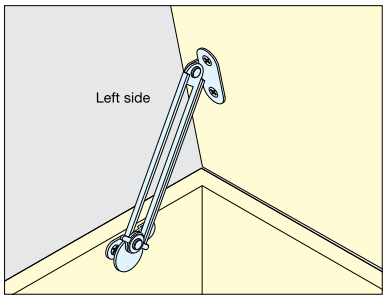

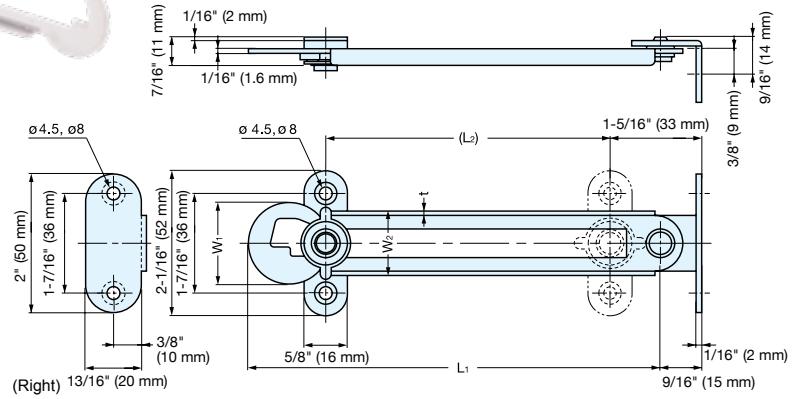

Material	Finish
304 Stainless Steel	Polished

Item No.		L1	(L2)	W1	W2	t	Load Capacity	Weight (g)	Box (pcs)	Carton (pcs)
Left	Right									
S-91L	S-91R	10-15/16" (277 mm)	9-1/16" (230 mm)	1-3/16" (30 mm)	15/16" (24 mm)	1/16" (2 mm)	88 lbs (40 kg)	120	100	1000
S-92L	S-92R	7-13/16" (198 mm)	6" (152 mm)	1-1/8" (28 mm)	15/16" (23 mm)	1/16" (1.5 mm)		85	30	180
S-93L	S-93R	5-15/16" (150 mm)	4-1/8" (105 mm)				66 lbs (30 kg)	75	60	240

LID STAY

NSF COMPONENT | RoHS compliant | STAINLESS 304 STEEL | LOAD CAPACITY 10~13 kg 22~28.5 lbs | NO SCREW

HS

- For downward-opening flap doors.
- Can be installed individually or in pairs.
- Non-Handed : Can be installed on left or right side.

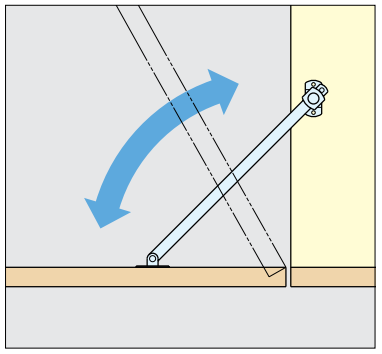

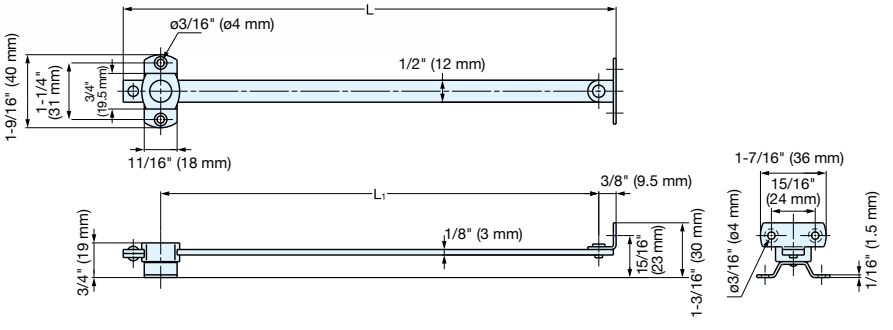

Material	Finish/Color
304 Stainless Steel	Satin
Polyamide	White

Item No.	L	L1	Load Capacity	Weight (g)	Box (pcs)	Carton (pcs)
HS-180	8-1/4" (210 mm)	7-1/16" (180 mm)	22.0 lbs (10 kg)	80	20	220
HS-210	9-7/16" (240 mm)	8-1/4" (210 mm)	26.5 lbs (12 kg)	90		
HS-240	10-5/8" (270 mm)	9-7/16" (240 mm)	28.5 lbs (13 kg)	100		