SPRING LOADED LID STAY

RoHS compliant | STAINLESS 430 STEEL | NO SCREW

S-AT01, S-AT02

- Side wall mounted.
- Spring mechanism assists in lifting door and holds in open position (10°~80°).
- Can be installed individually or in pairs.
- Non-Handed: Can be installed on left or right side.
- Does not work with concealed hinges.

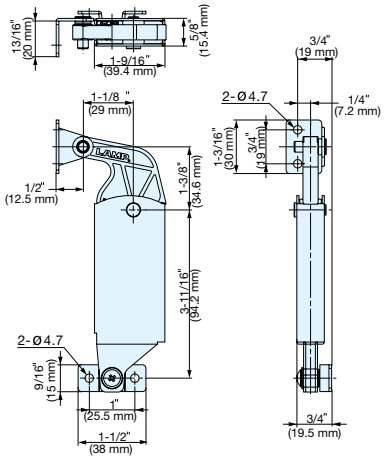

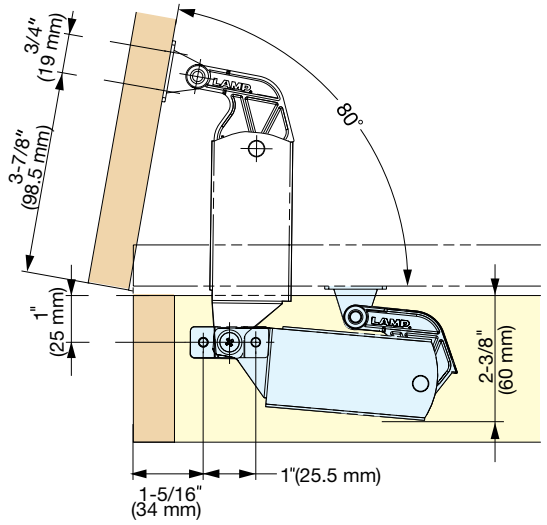

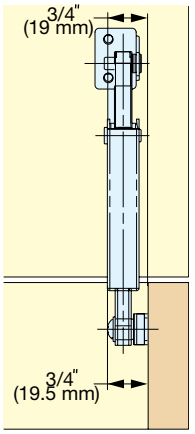

Item No.	Max. Torque per piece	Box (pcs)	Carton (pcs)
S-AT01	78 lbs·in (90 kgf·cm)	10	50
S-AT02	104 lbs·in (120 kgf·cm)		

Material	Finish
430 Stainless Steel/ Steel/Polyacetal	Plain

SPRING LOADED LID STAY

RoHS compliant | STAINLESS 430 STEEL | NO SCREW

S-AT01S, S-AT02S

- Back panel mounted.
- Spring mechanism assists in lifting door and holds in open position (10°~80°).
- Can be used individually or in multiples.
- Does not work with concealed hinges.

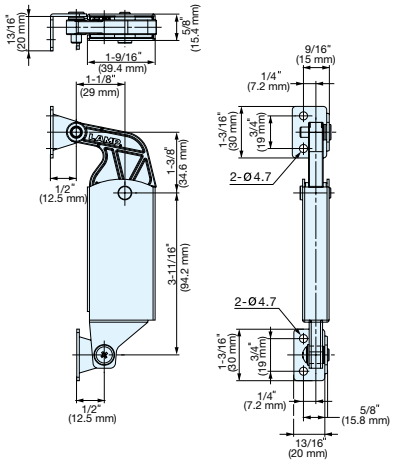

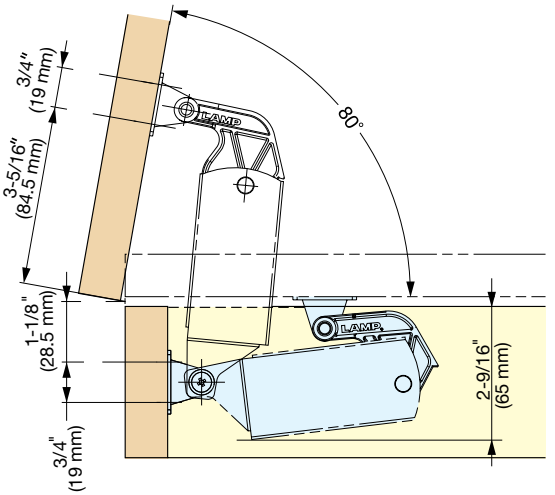

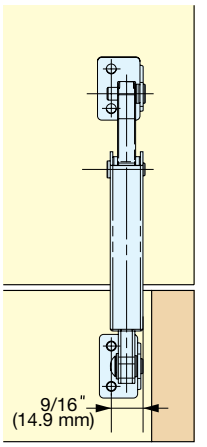

Item No.	Max. Torque per piece	Box (pcs)	Carton (pcs)
S-AT01S	78 lbs·in (90 kgf·cm)	10	50
S-AT02S	104 lbs·in (120 kgf·cm)		

Material	Finish
430 Stainless Steel/ Steel/Polyacetal	Plain