



SOFT-DOWN STAY



- For UPWARD-OPENING FLAP DOOR used with concealed, piano or butt hinges.
- SDS-C301N is designed to hold door in closed and opened position.
- Non-handed.
- Torque Calculation:  
 Torque = Door Height × 0.5 × Door Weight  
 Per Piece: 35~60 lbs-in (40~70 kg-cm)  
 Per Pair: 70~120 lbs-in (80~140 kg-cm)

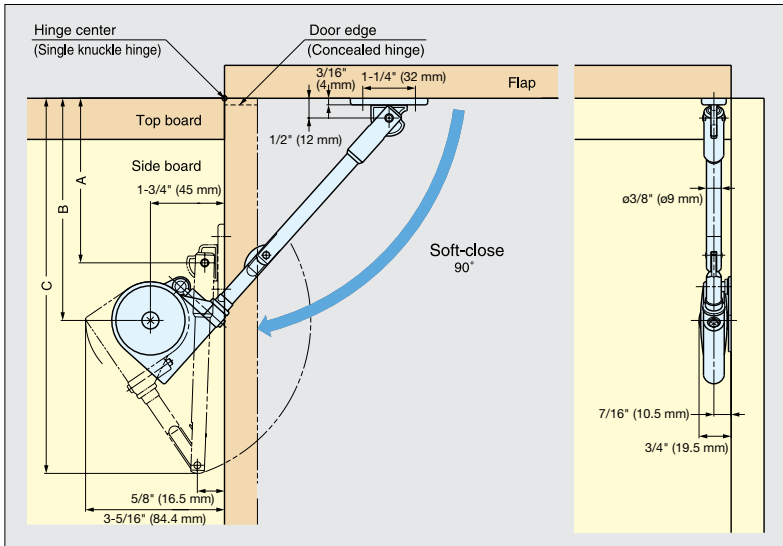

Mounting Plate SDS-A (Included)

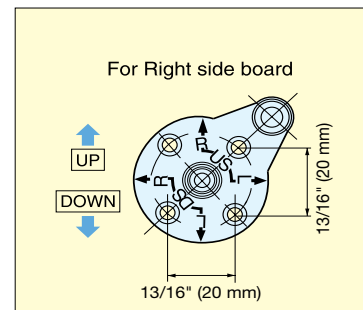

Hinge Type	Coverage	A	B	C
Concealed Hinge	Full overlay (3/4")	4-1/4" (108 mm)	5-5/8" (143 mm)	9-1/8" (232 mm)
Single Knuckle Hinge	Overlay	3-15/16" (100 mm)	5-5/16" (135 mm)	8-3/4" (223 mm)
	Inset	3-13/16" (97 mm)	5-3/16" (132 mm)	8-11/16" (220 mm)

Item No.	Color	Weight (g)	Box (pcs)	Carton (pcs)	Material	Finish/Color
SDS-C301N/WHT	White	165	20	100	Steel, Zinc Alloy	Nickel
SDS-C301N/BLK	Black				Plastic	Black, White