TORQUE DAMPER

UDH

UDH Type

- Keeps lid from slamming shut.
- High torque within compact cartridge.
- Operating temperature: 32°F~104°F (0°C~40°C)



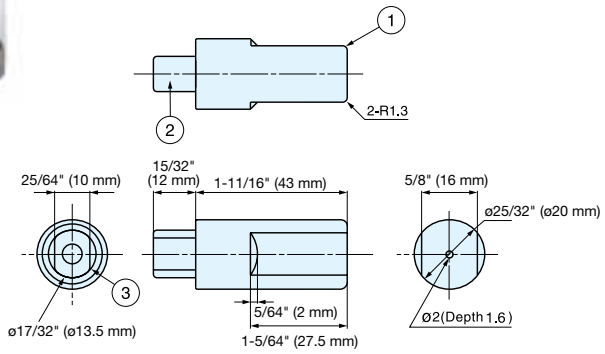

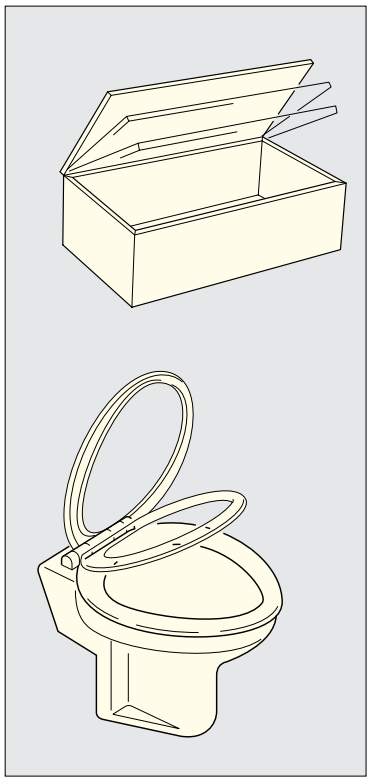

UDH-16 Type



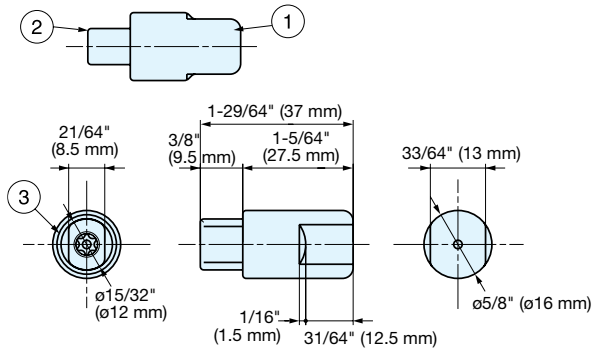

UDH-16N Type



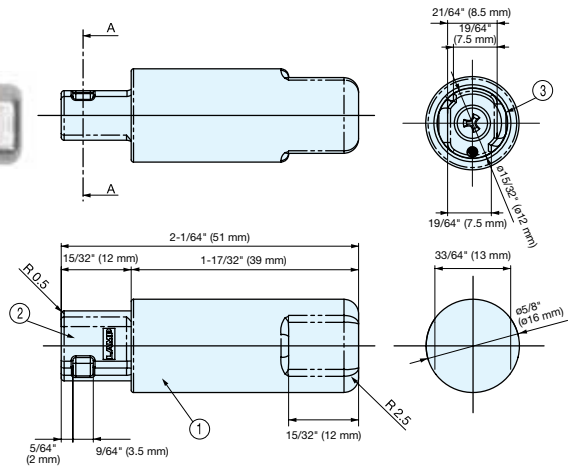

Application

UDH Type

No.	Part Name	Material	Finish/Color
①	Body	304 Stainless Steel	Plain
②	Shaft	PBT Plastic	A-White, B-Grey
③	Cover Ring	304 Stainless Steel	-

UDH-16 Type

No.	Part Name	Material	Finish/Color
①	Body	304 Stainless Steel	Plain
②	Shaft	PBT Plastic	A-White B-Grey
③	Cover Ring		-

UDH-16N Type

No.	Part Name	Material	Finish/Color
①	Body	304 Stainless Steel	Plain
②	Shaft	PBT Plastic	A-White B-Grey
③	Cover Ring	PPS Plastic	-

Item No.	Torque per piece	Dampening Direction	Weight (g)	Carton (pcs)
UDH-AMS	13 ~ 21 lbs·in (15 ~ 25 kgf·cm)	Counter Clockwise	38	200
UDH-BMS		Clockwise		
UDH-AHS	21 ~ 30 lbs·in (25 ~ 35 kgf·cm)	Counter Clockwise		
UDH-BHS		Clockwise		
UDH-AGS	30 ~ 34 lbs·in (35 ~ 40 kgf·cm)	Counter Clockwise		
UDH-16AMS	8.8~15 lbs·in (10.2~17.3 kgf·cm)	Counter Clockwise	16	200
UDH-16BMS		Clockwise		
UDH-16AHS	15~22 lbs·in (17.3~25.5 kgf·cm)	Counter Clockwise		
UDH-16BHS		Clockwise		
UDH-16N AMS	15~21.2 lbs·in (17.3~24.5 kgf·cm)	Counter Clockwise	20	200
UDH-16N BMS		Clockwise		
UDH-16N AHS	19.4~26.6 lbs·in (22.4~30.6 kgf·cm)	Counter Clockwise		
UDH-16N BHS		Clockwise		